

DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G43L NC010 is a 43% glass fiber reinforced polyamide 66 resin for injection moulding.

General information	Value	Unit	Test Standard
Resin Identification	PA66-GF43	-	-
Part Marking Code	>PA66-GF43<	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Viscosity number	130 / *	cm ³ /g	ISO 307, 1157, 1628
Moulding shrinkage, parallel	0.3 / *	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.0 / *	%	ISO 294-4, 2577
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	14000 / 11000	MPa	ISO 527-1/-2
Stress at break	225 / 160	MPa	ISO 527-1/-2
Strain at break	3 / 4	%	ISO 527-1/-2
Flexural Modulus	12000 / 8900	MPa	ISO 178
Flexural Strength	340 / 260	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	* / 10800	MPa	
1000h	* / 7960	MPa	
Charpy impact strength			ISO 179/1eU
23 °C	100 / 105	kJ/m ²	
-30 °C	85 / 75	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
23 °C	16 / 19	kJ/m ²	
-30 °C	12 / 12	kJ/m ²	
-40 °C	11 / 11	kJ/m ²	
Izod notched impact strength			ISO 180/1A
23 °C	14 / 16	kJ/m ²	
-30 °C	12 / 11	kJ/m ²	
-40 °C	11 / 11	kJ/m ²	
Izod impact strength			ISO 180/1U
23 °C	105 / 90	kJ/m ²	
-30 °C	105 / 65	kJ/m ²	
Hardness, Rockwell, M-scale	105 / 90	-	ISO 2039-2
Hardness, Rockwell, R-scale	125 / 118	-	ISO 2039-2
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 10 °C/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10 °C/min	80 / -	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
1.8 MPa	255 / *	°C	
0.45 MPa	262 / *	°C	
Vicat softening temperature, 50 °C/h, 50N	255 / *	°C	ISO 306
Coeff. of linear therm. expansion, parallel	15 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	79 / *	E-6/K	ISO 11359-1/-2

Revised: 2014-06-11

Page: 1 of 22

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2014 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Thermal conductivity of melt	0.25	W/(m K)	-
Spec. heat capacity of melt	2050	J/(kg K)	-
RTI, electrical, 0.75 mm	130 / *	°C	UL 746B
RTI, impact, 0.75 mm	120	°C	UL 746B
RTI, strength, 0.75 mm	130	°C	UL 746B
Flammability	dry / cond	Unit	Test Standard
Burning Behav. at 1.5mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
UL recognition	UL / *	-	-
Burning Behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.71 / *	mm	IEC 60695-11-10
Oxygen index	23 / *	%	ISO 4589-1/-2
Glow Wire Flammability Index			IEC 60695-2-1/2
0.75mm	650 / -	°C	
1.5mm	650 / -	°C	
3mm	825 / -	°C	
Glow Wire Ignition Temperature			IEC 60695-2-1/3
0.75mm	675 / -	°C	
1.5mm	675 / -	°C	
3mm	700 / -	°C	
Burning rate, Thickness 1 mm	27	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	dry / cond	Unit	Test Standard
Relative permittivity			IEC 60250
100Hz	4.5 / -	-	
1MHz	4.1 / 4.9	-	
Dissipation factor			IEC 60250
100Hz	100 / -	E-4	
1MHz	145 / 600	E-4	
Volume resistivity	>1E13 / 1E10	Ohm*m	IEC 60093
Surface resistivity	* / 1E12	Ohm	IEC 60093
Electric strength	27 / -	kV/mm	IEC 60243-1
Electric Strength, Short Time, 2mm	27 / -	kV/mm	IEC 60243-1
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 2mm	1.5 / *	%	Sim. to ISO 62
Water absorption, 2mm	4.7 / *	%	Sim. to ISO 62
Density	1490 / -	kg/m ³	ISO 1183
Density of melt	1290	kg/m ³	-
Water Absorption, Immersion 24h	0.9 / *	%	ASTM D 570

Characteristics

Processing	• Injection Moulding
Delivery form	• Pellets
Additives	• Lubricants
Regional Availability	• North America
	• Europe
	• Release agent
	• Asia Pacific
	• South and Central America
	• Near East/Africa
	• Global

Processing Texts

Injection molding

PREPROCESSING

Drying recommended = Yes, if moisture content of resin exceeds recommended level

Drying temperature = 80°C

Drying time, dehumidified dryer = 2-4 h

Processing moisture content = <0.2 %

PROCESSING

Revised: 2014-06-11

Page: 2 of 22

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



Copyright 2014 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Melt temperature optimum = 295 °C
Melt temperature range = 285-305 °C
Mould temperature optimum = 100 °C
Mould temperature range = 70-120 °C
Maximum Screw tangential Speed : 0.15 m/s
Flow front speed : 150 mm/s
Hold pressure optimum : 85 MPa
Hold pressure range : 50-100 MPa
Back pressure : low
Hold pressure time : 2.5 s/mm
Maximum hold-up time : 15 min

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




DuPont™ Zytel® 70G43L NC010


NYLON RESIN

Diagrams

Viscosity-shear rate

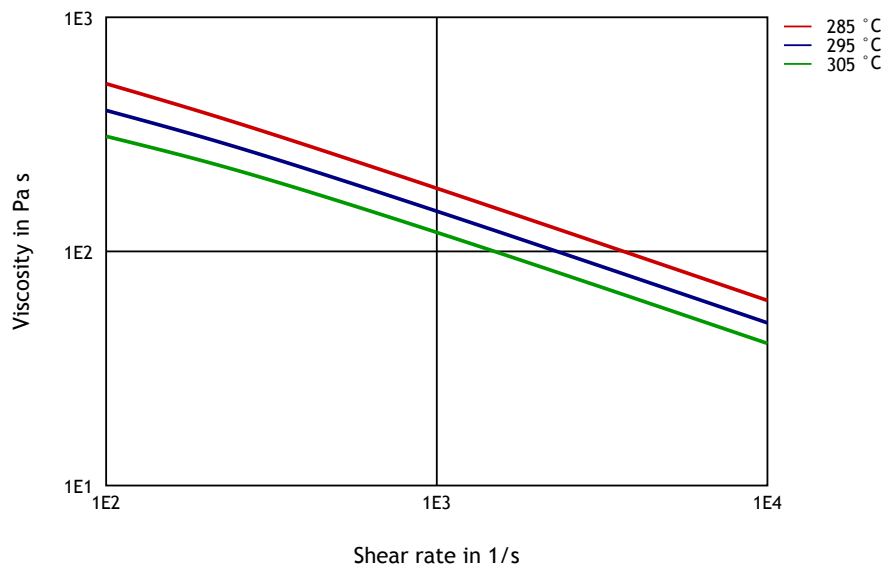


Shearstress-shear rate

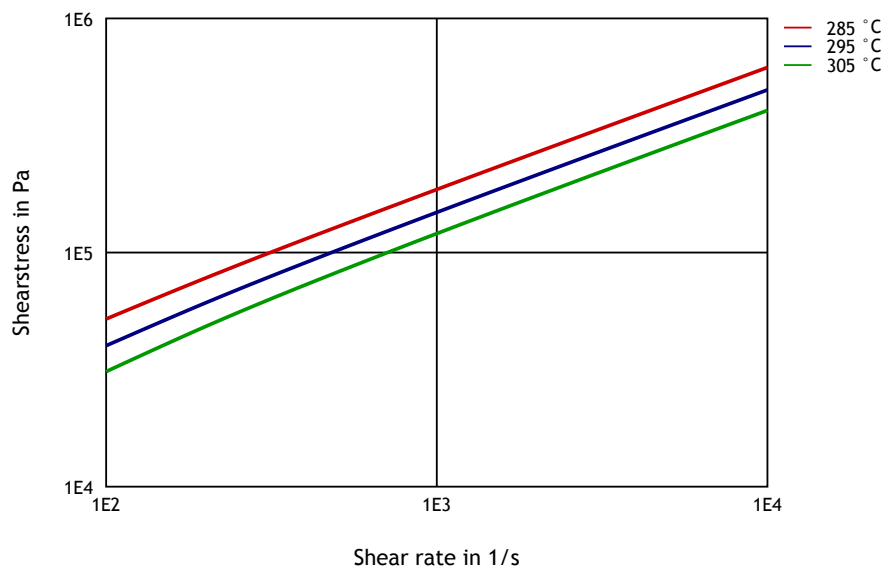


DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Dynamic Shear modulus-temperature (dry)

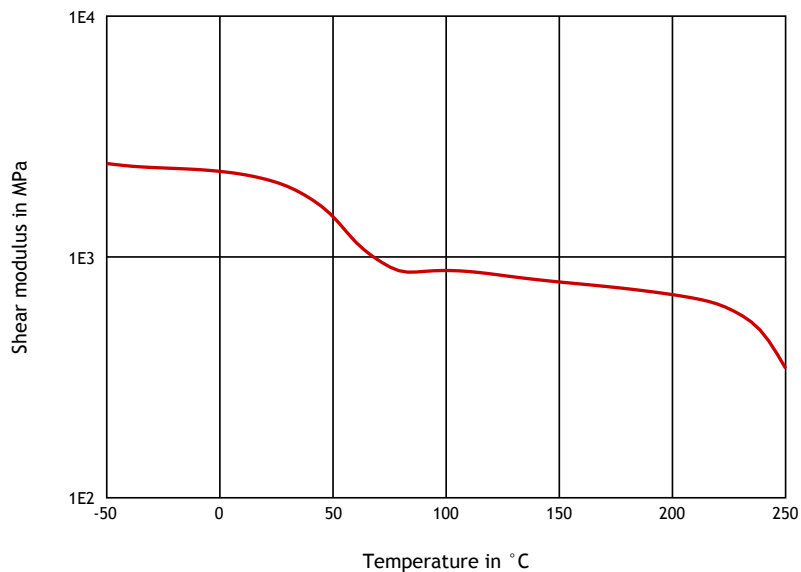

Dynamic Tensile modulus-temperature (dry)

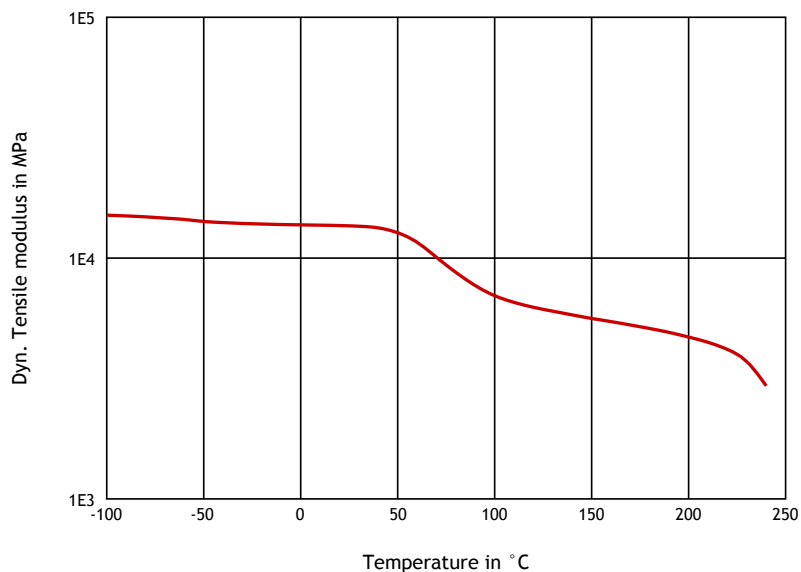

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (dry)

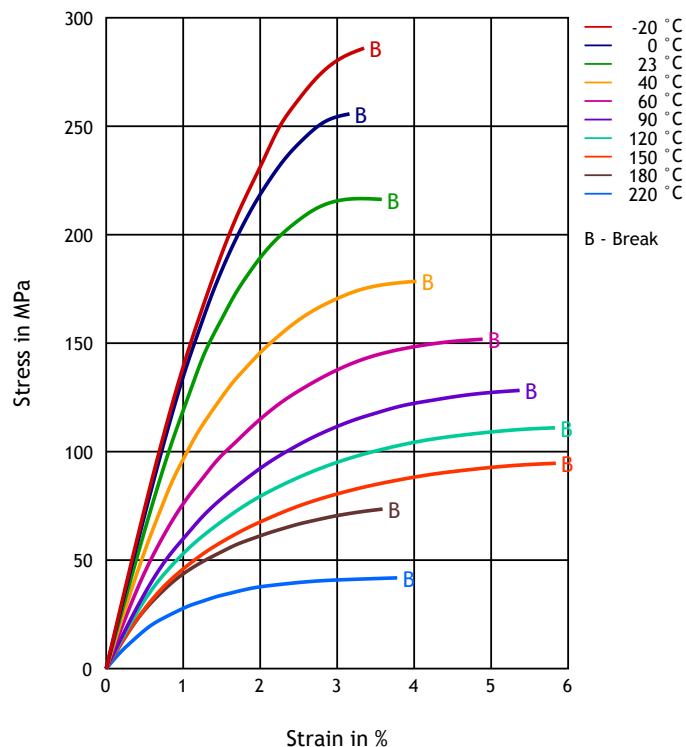

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (cond.)

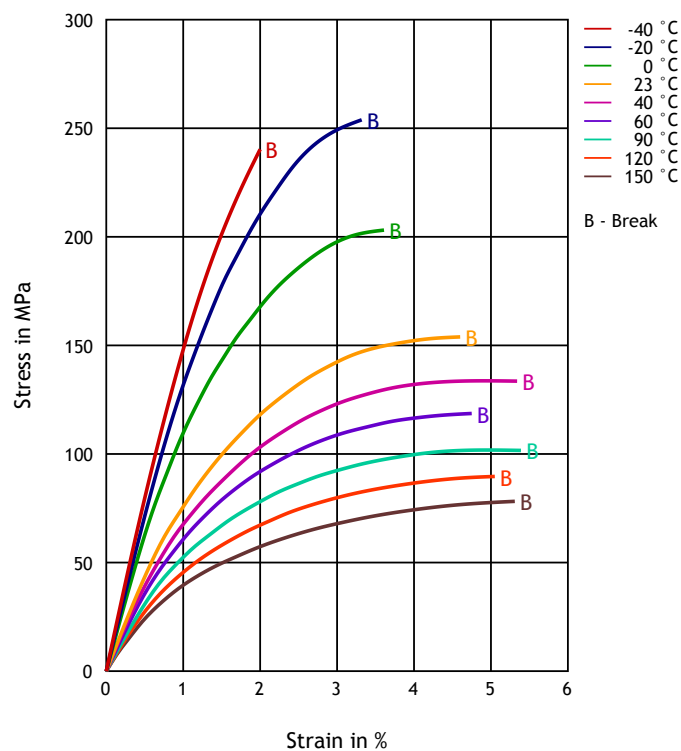

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Secant modulus-strain (dry)

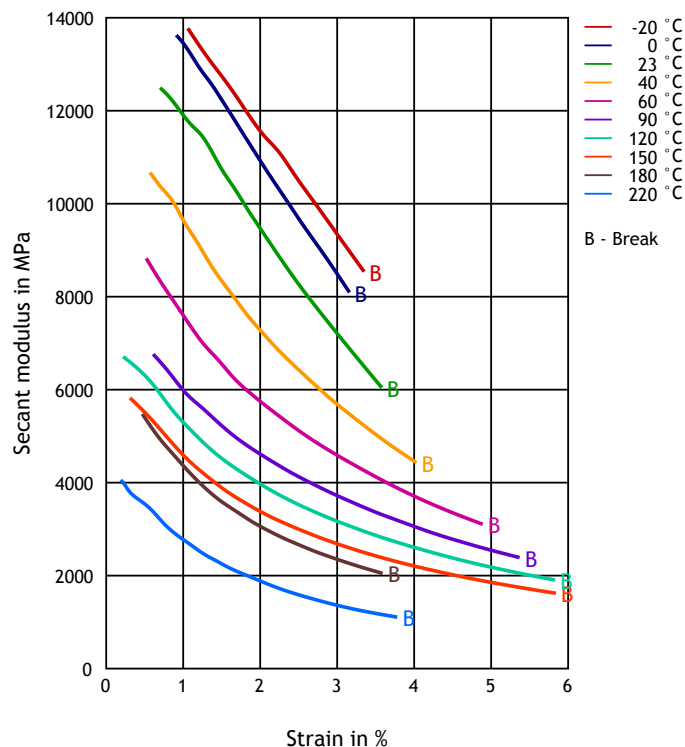

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Secant modulus-strain (cond.)

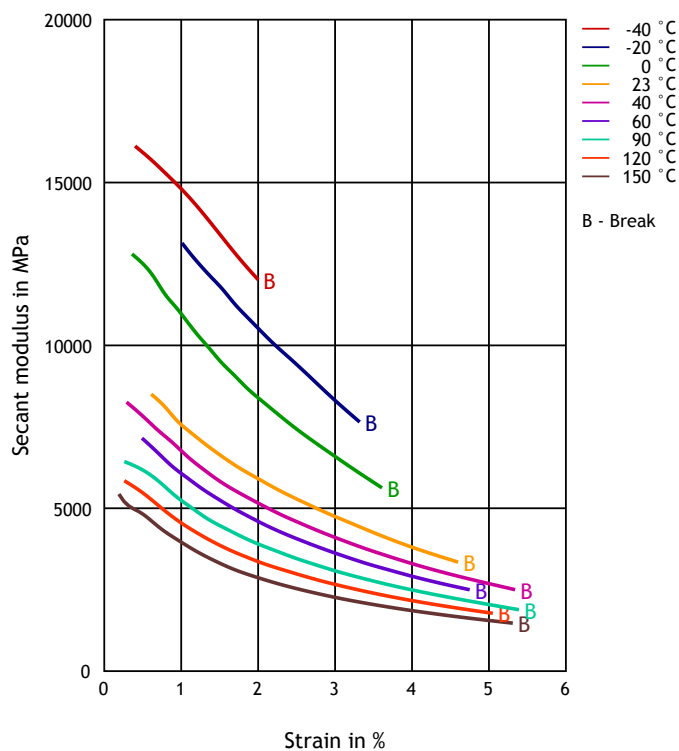

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (isochronous) 23°C (cond.)

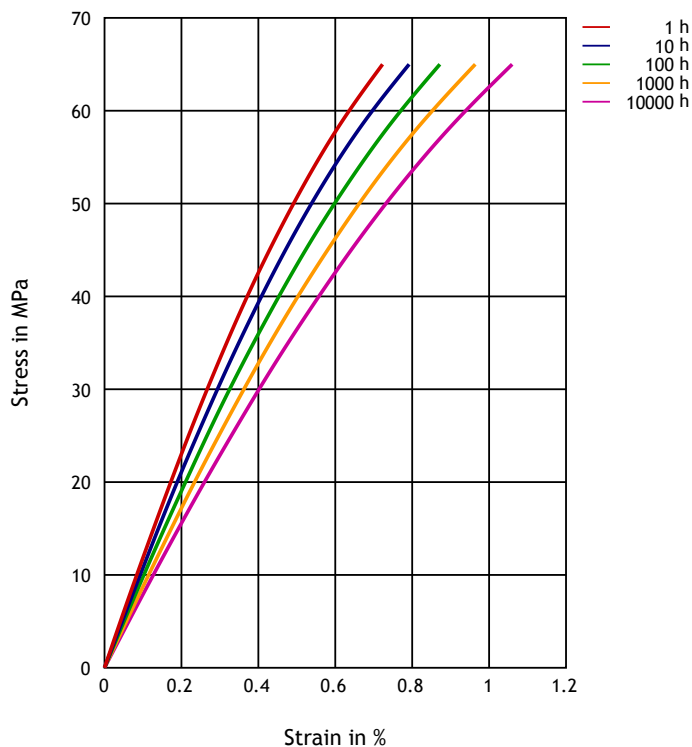

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Creep modulus-time 23 °C (cond.)

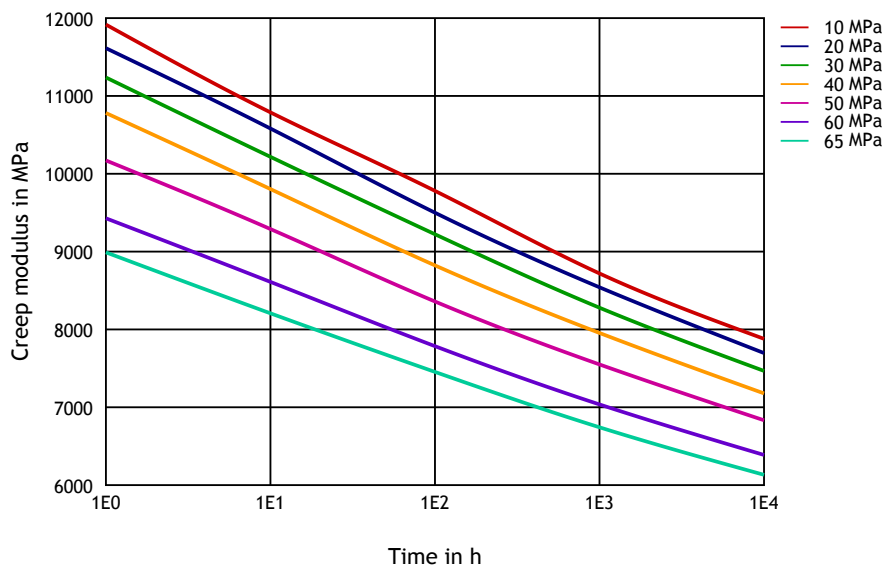

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (isochronous) 60°C (cond.)

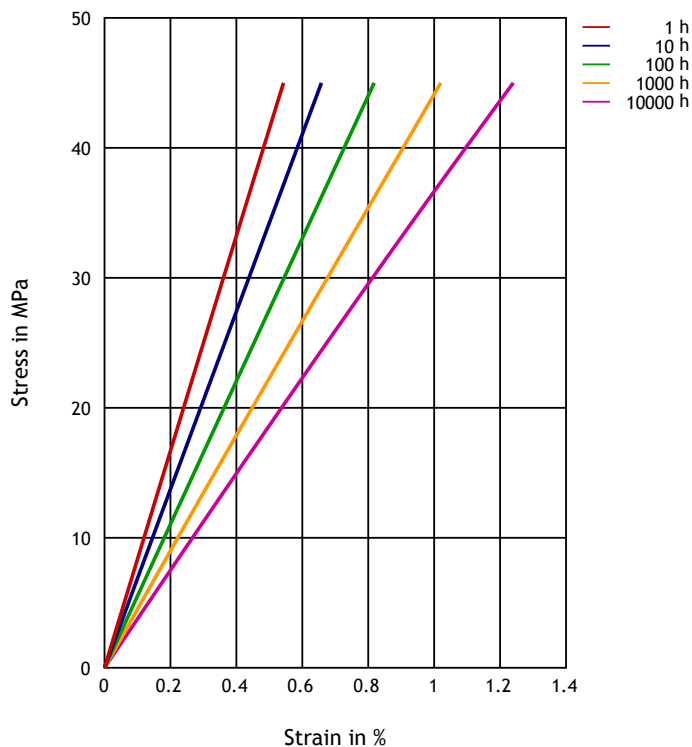

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Creep modulus-time 60 °C (cond.)

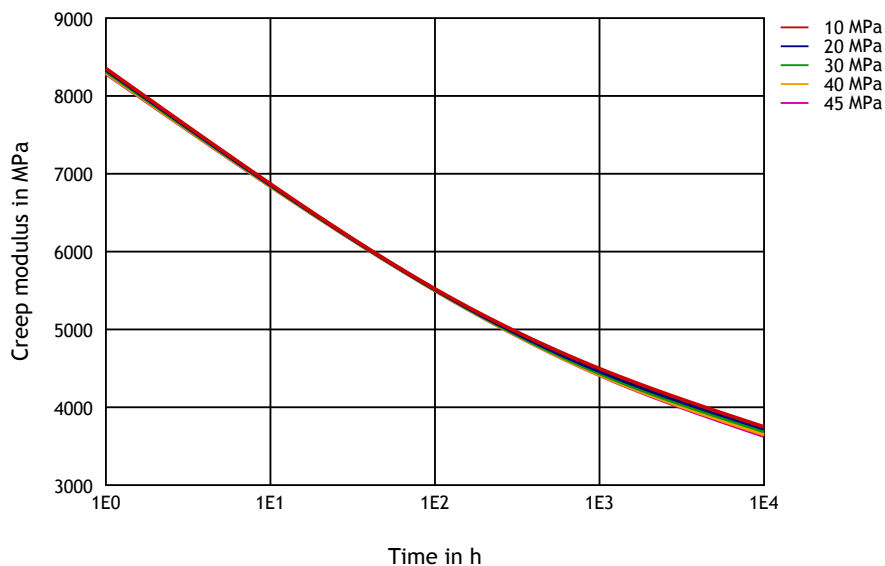

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (isochronous) 90°C (cond.)

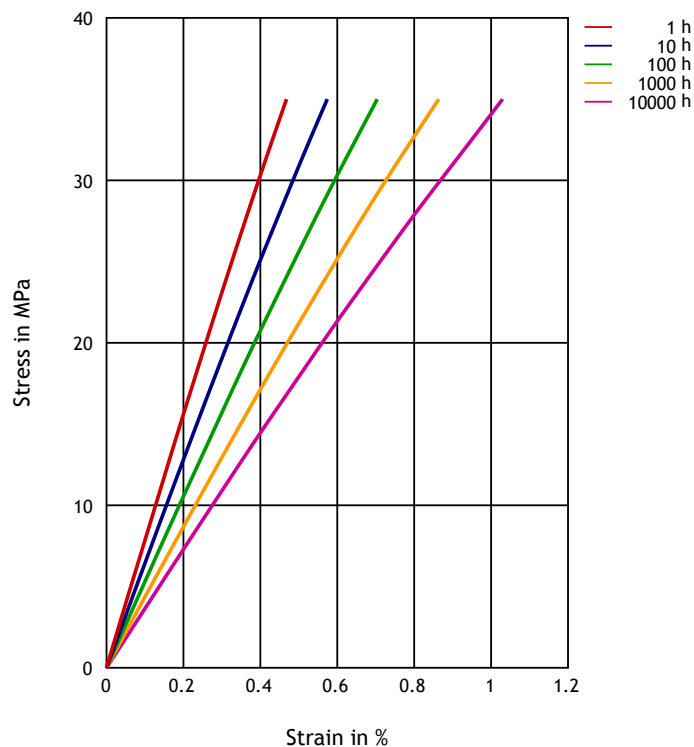

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Creep modulus-time 90 °C (cond.)

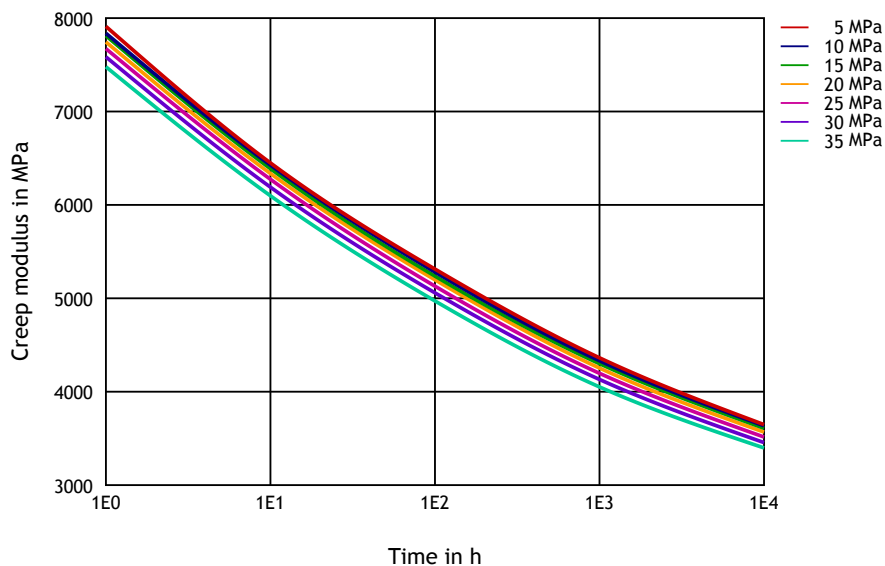

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (isochronous) 100°C (cond.)

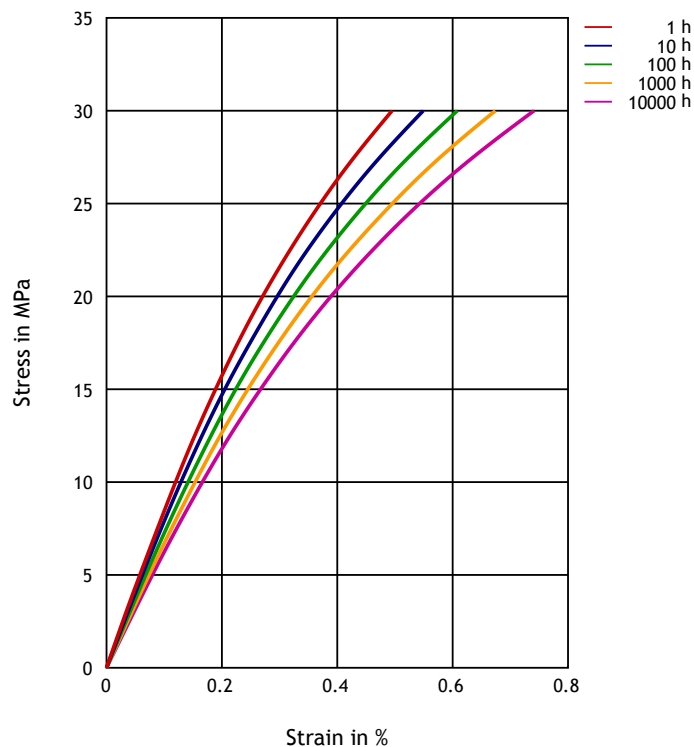

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Creep modulus-time 100°C (cond.)

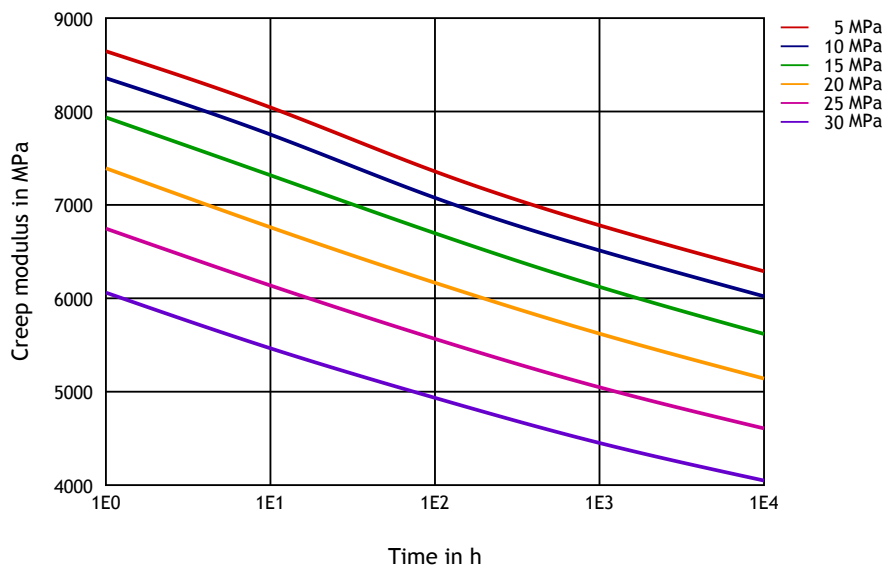

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Stress-strain (isochronous) 150°C (cond.)

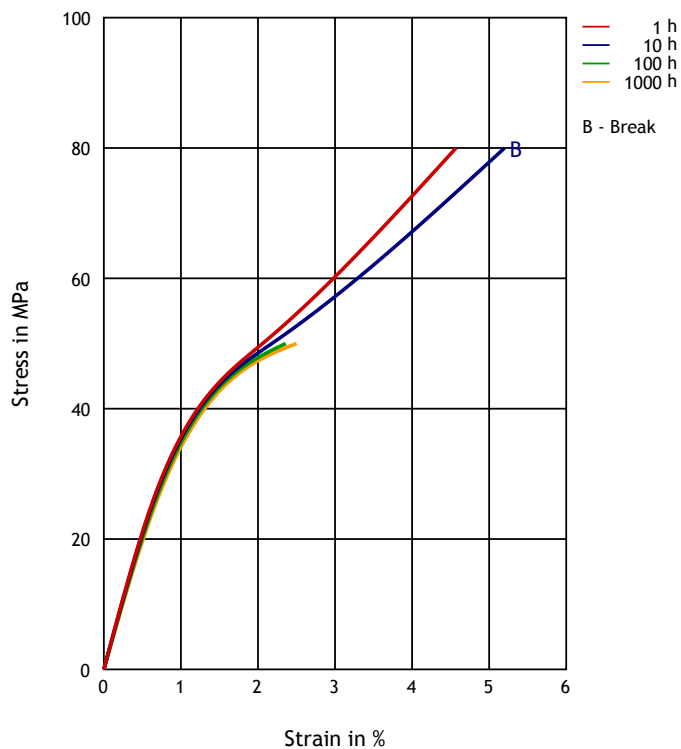

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11




DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Creep modulus-time 150°C (cond.)

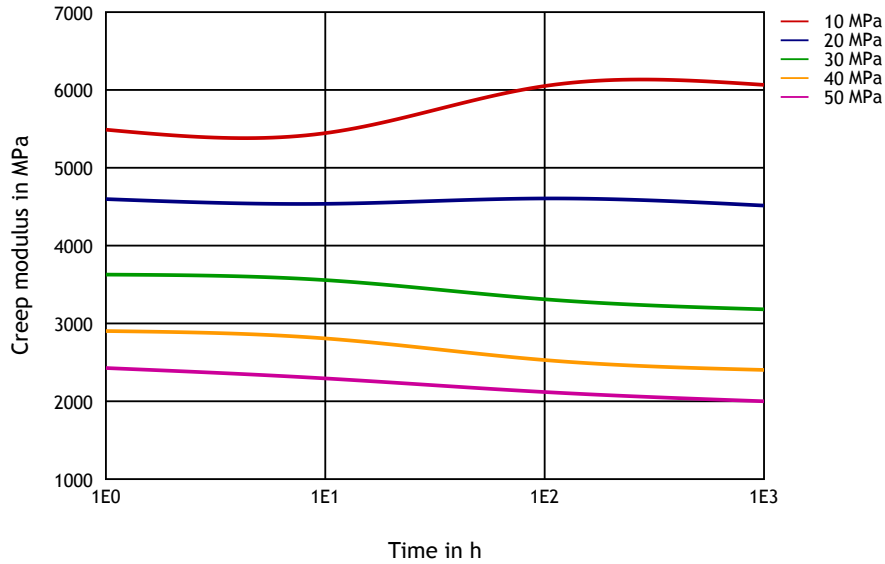

Specific volume-temperature (pvT)

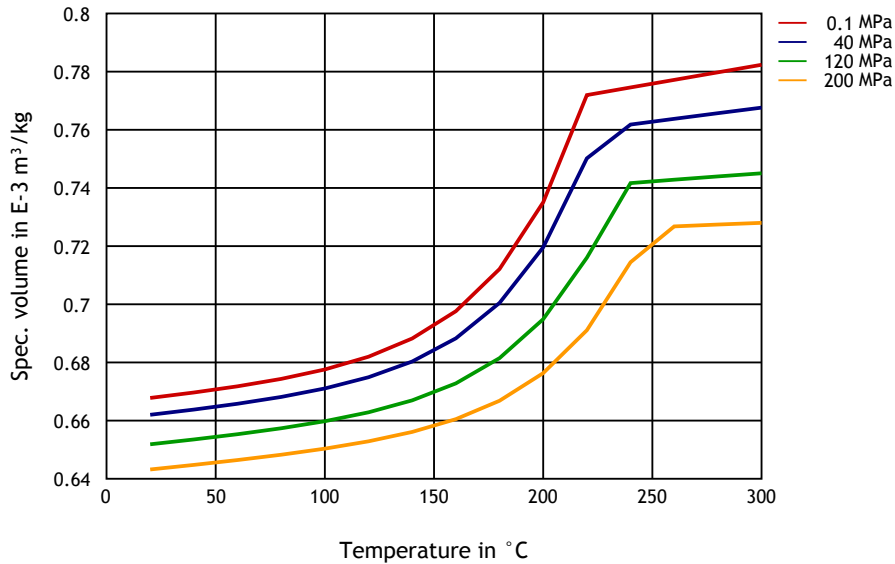

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11




DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Tensile modulus-temperature (dry)

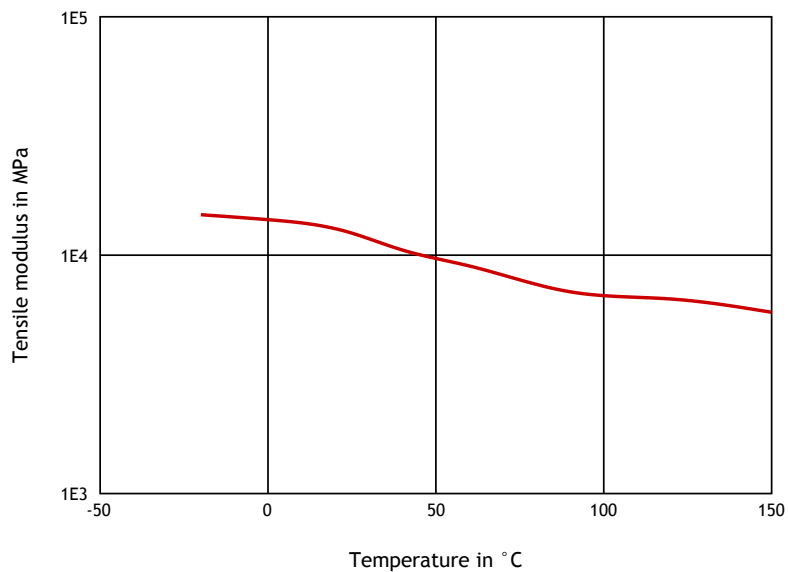

Tensile modulus-temperature (cond.)

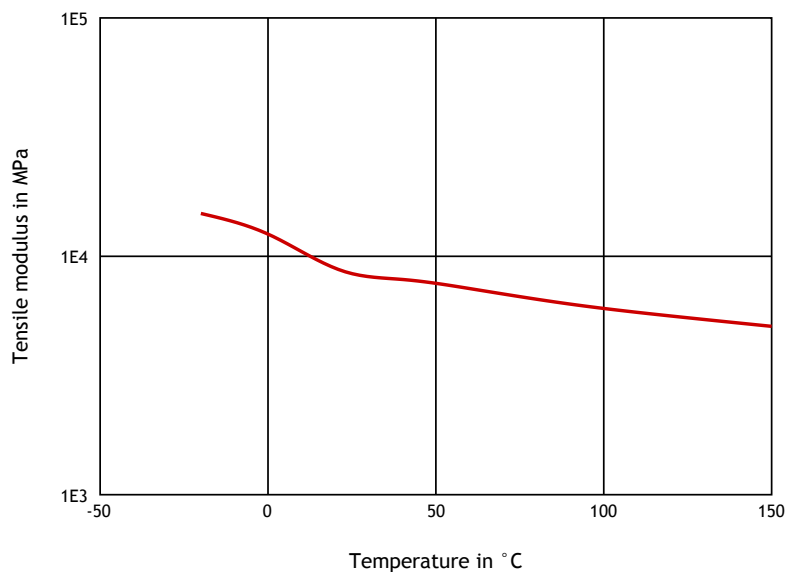

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

Ketones

- ✓ Acetone (23 °C)

Ethers

- ✓ Diethyl ether (23 °C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✓ SAE 10W40 multigrade motor oil (130 °C)
- ✓ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✓ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)



DuPont™ Zytel® 70G43L NC010

NYLON RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (130°C)
- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✓ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- ✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 4.0mm (Hytrel® measured at 2 mm), IEC Electrical properties measured at 2.0mm, all ASTM properties measured at 3.2mm, and test temperatures are 23°C unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-4.

Copyright © 2014 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

